


ZSF-AD20~50t / ZSF-ADSS20~50t

A/D Module Resolution	100000
Rated load	20,25,30,40,50t
Rated output	20000,25000,30000,40000,50000
Digital Refurbishing Frequency	10-15 deg/s
Communication BPS	9600 (19200)
Accuracy Class	OIML R60 C5
Creep	+0,01% F.S/30min
TCO	+0,014% F.S/10C
Tc Span +20~40C	+0,0105% F.S/10C
Tc Span -10~20C	+0,007% F.S/10C
Use Temp Range	-30~+70C
Safe Overload	150%F.S
Lateral load limit	300%F.S
Enviromental Protection	IP68
Recommended Excitation	7~15V DC
Number of the address bus	16 Mux
Construction	Alloy Steel / Stainless Steel



Wiring Schematic Diagram

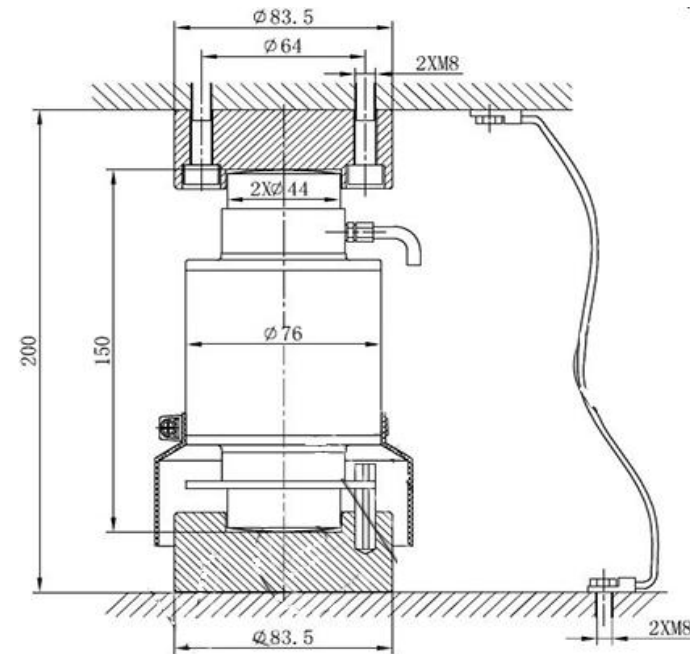